

EMI Reduction Spread Spectrum Clock Oscillators [Programmable Quick Turn]



HM _ B

B group

SMD


CMOS

2.5 V
3.3 V

Min.
3.0 MHz

Max.
200 MHz

- Reduces electromagnetic Interference (EMI) by approx. 12 dB to 18 dB .
- Drop-In Replacement for Conventional Oscillators
- No Need to Re-Spin the Board or Solder Pad Layout
- Operates with a +2.5V or 3.3V Supply Voltage
- 5.0 x 3.2 or 7.0 x 5.0 mm package sizes

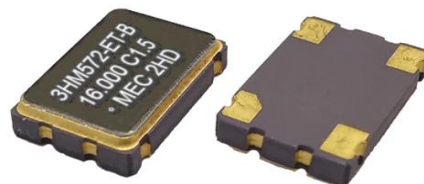

General specifications of all available packages , at Ta=+25°C , CL=15pF

Group	B group		
Available Packages	HM53 (5.0 * 3.2 * 1.2 mm)	HM572 (7.0 * 5.0 * 1.4 mm)	HM43 (11.4 * 9.6 * 3.0 mm)
Frequency Range	3.0 MHz ~ 166 MHz	3.0 MHz ~ 200 MHz	3.0 MHz ~ 200 MHz
Output Waveform	CMOS (square wave)		
Supply Voltage (V _{DD})	+ 2.5 V ± 10%		+ 3.3 V ± 10%
Output Logic High " 1 "	2.25 V (min.)		2.97 V (min.)
Output Logic Low " 0 "	0.25 V (max.)		0.33 V (max.)

Spread Type	Spread Percentage EMI Reduction Rate			
Center Spread (" C ")	± 0.125 % (C0.125) to ± 2.0 % (C2.0) in ± 0.125 % steps			
Down Spread (" D ")	- 0.25 % (D0.25) to - 4.0 % (D4.0) in 0.25 % steps			
Frequency Stability Codes (exclude modulation)	Frequency Stability over Operating Temperature Range	± 25 ppm	± 50 ppm	± 100 ppm
	Commercial (-10°C to +70°C)	A	B	C
	Industrial (-40°C to +85°C)	D	E	F
Modulation Carrier Freq. (Dither rate)	30 KHz (min.) ; 40.0 KHz (max.) Frequency dependent. Call for details.			
Current Consumption	3 MHz ~ 100 MHz : 20 mA (max.)		101 MHz ~ 200 MHz : 30 mA (max.)	
Rise Time / Fall Time	5.0 nsec (max.) , 10% ↔ 90% waveform			
Output Load	15 pF			
Start-up Time	3.0 msec. (typ.) ; 5 msec. (max.)			
Duty Cycle	50% ± 10%			
Aging at Ta = +25°C	± 5 ppm per year (max.)			
Storage Temperature	-55°C to + 125°C			
Output Enable / Disable Function	Enable	70% (min.) of V _{DD} to Enable Output.		
	Disable	30% (max.) of V _{DD} to Disable Output.		
	Output enable /disable time: 100 nsec. (max.)			

EMI Reduction Spread Spectrum Clock Oscillators

Part Number Format and Example

	[1]	[2]		[3]	[4]		[5]	[6]		[7]
	Supply Voltage	Holder Type	-	Frequency Stability	OE Function	-	Center Frequency	Group Type	-	Spread type Percentage

Examples	(1)	3	HM572	-	B	T	-	10.000	R	-	C1.5
	(2)	3	HM53	-	F	T	-	75.000	B	-	C2.0
	(3)	3	HM43	-	E	T	-	25.000	R	-	D0.25


[1]	Supply voltage code : " 3 " for +3.3V
[2]	Holder Type (HM53 , HM57 or HM43)
[3]	-10°C ~ 70 °C " A " ± 25ppm ; " B " ± 50ppm ; " C " ± 100ppm ;
	-40°C ~ 85 °C " D " ± 25ppm ; " E " ± 50ppm ; " F " ± 100ppm ;
[4]	" T " for OE Function
[5]	Frequency in MHz
[6]	Group " R " , " B "
[7]	Spread type & percentage ; " C " for center spread , " D " for down spread

Outline Dimensions (Unit : mm) , Suggested pad Layout for SMDs

<p>[HM 53] For group : R B</p> <div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> <p>Top View 5.0±0.1 3.2±0.1</p> </div> <div style="text-align: center;"> <p>Bottom View 1.2±0.1 1.0±0.1 2.54 2.2</p> </div> <div style="text-align: center;"> <p>Land Pattern 1.6 2.54 1.5 2.5</p> </div> </div> <div style="display: flex; justify-content: space-around; margin-top: 10px;"> <div style="text-align: center;"> <p>Side View 1.2±0.1</p> </div> <div> <p>Pad Connections : Pad 1 : OE Pad 2 : Ground</p> </div> <div style="text-align: center;"> <p>Pad 3 : Output Pad 4 : Supply Voltage</p> </div> </div>	<p>[HM 572] For group : R B</p> <div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> <p>Top View 7.0±0.2 5.0±0.2</p> </div> <div style="text-align: center;"> <p>Bottom View 1.4±0.1 1.2±0.1 5.08 3.7</p> </div> <div style="text-align: center;"> <p>Land Pattern 5.08 4.2 2.0 2.54 2.2</p> </div> </div> <div style="display: flex; justify-content: space-around; margin-top: 10px;"> <div style="text-align: center;"> <p>Side View 1.4±0.1</p> </div> <div> <p>Pad Connections : Pad1 : OE Pad2 : Ground</p> </div> <div style="text-align: center;"> <p>Pad3 : Output Pad4 : Supply Voltage</p> </div> </div>
<p>[HM 43] For group : R B</p> <div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> <p>Top View 9.6±0.2 11.4±0.2</p> </div> <div style="text-align: center;"> <p>Side View 0.7</p> </div> <div style="text-align: center;"> <p>Bottom View 1.3±0.1 7.0±0.1 5.08 1.4±0.1</p> </div> </div> <div style="display: flex; justify-content: space-around; margin-top: 10px;"> <div style="text-align: center;"> <p>Side View 0.6 3.0±0.2</p> </div> <div> <p>Pad Connections : Pad1 : OE Pad2 : Ground Pad3 : Output Pad4 : Supply Voltage</p> </div> </div>	

Emboss Taping and Reel Specifications

[Crystal Oscillator Units]

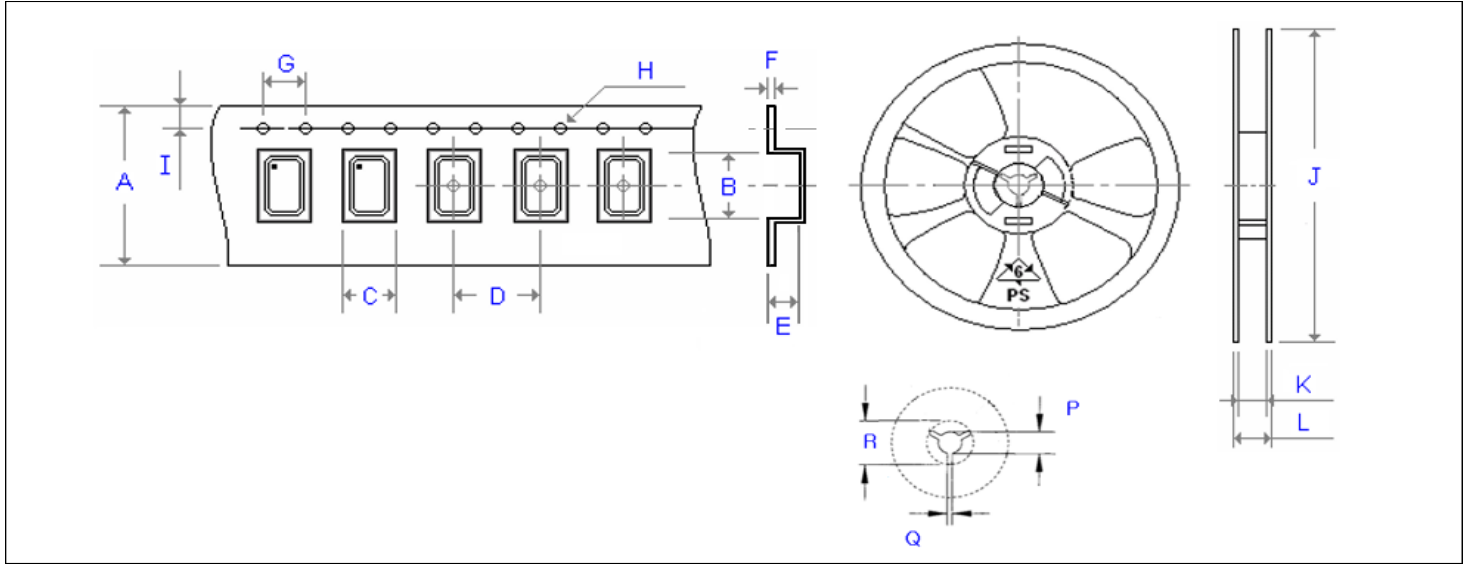

Carrier Type Dimensions (unit : mm) ±0.3mm

	A	B	C	D	E	F	G	H	I	pcs / reel
H21	8.00	2.30	1.90	4.00	0.90	0.25	4.00	∅ 1.50	1.75	3000
H_22	8.00	2.80	2.25	4.00	1.10	0.30	4.00	∅ 1.50	1.75	3000
H_32	8.00	3.40	2.70	4.00	1.40	0.25	4.00	∅ 1.50	1.75	3000
H_53	12.00	5.30	3.60	8.00	1.40	0.30	4.00	∅ 1.50	1.75	1000
H_57	16.00	7.30	5.30	8.00	1.90	0.32	4.00	∅ 1.50	1.75	1000
SWO	16.00	7.20	5.40	8.00	1.80	0.32	4.00	∅ 1.50	1.75	1000
H_226	8.00	2.80	2.25	4.00	1.10	0.30	4.00	∅ 1.50	1.75	3000
H_326	8.00	3.40	2.70	4.00	1.40	0.25	4.00	∅ 1.50	1.75	3000
H_536	12.00	5.30	3.60	8.00	1.40	0.30	4.00	∅ 1.50	1.75	1000
H_576	16.00	7.30	5.30	8.00	1.90	0.32	4.00	∅ 1.50	1.75	1000
H_JF328	8.00	3.40	2.70	4.00	1.40	0.25	4.00	∅ 1.50	1.75	3000
H_JF538	12.00	5.30	3.60	8.00	1.40	0.30	4.00	∅ 1.50	1.75	1000
H_JF578	16.00	7.30	5.30	8.00	1.90	0.32	4.00	∅ 1.50	1.75	1000
H_43	24.00	11.80	10.00	16.00	5.00	0.30	4.00	∅ 1.50	1.75	500

Reel Dimensions (unit : mm) ±2mm

	J	K	L	P	Q	R	pcs / reel
H21	180.00	9.00	12.000	13.00	2.50	20.20	3000
H_22	180.00	8.40	11.400	13.00	2.50	20.20	3000
H_32	180.00	9.00	12.000	13.00	2.50	20.20	3000
H_53	180.00	13.00	16.000	13.00	2.50	20.20	1000
H_57	180.00	17.20	19.300	13.00	2.50	20.20	1000
SWO	180.00	17.20	19.300	13.00	2.50	20.20	1000
H_226	180.00	8.40	11.400	13.00	2.50	20.20	3000
H_326	180.00	9.00	12.000	13.00	2.50	20.20	3000
H_536	180.00	13.00	16.000	13.00	2.50	20.20	1000
H_576	180.00	17.20	19.300	13.00	2.50	20.20	1000
H_JF328	180.00	8.00	12.000	13.00	2.50	20.20	3000
H_JF538	180.00	13.00	16.000	13.00	2.50	20.20	1000
H_JF578	180.00	17.20	19.300	13.00	2.50	20.20	1000
H_43	330.00	24.50	29.100	13.00	2.50	20.20	500

Mercury www.mercury-crystal.com ■Taiwan : Tel: (+886)-2-2406-2779 / sales-tw@mercury-crystal.com

■USA : Tel: (+1)-909-466-0427 / sales-us@mercury-crystal.com ■China : Tel: (+86)-512-5763-8100 / sales-cn@mercury-crystal.com